

# ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804




Owner of the Declaration	<b>NedZink B.V.</b>
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-NED-20140083-IBA2-EN
ECO EPD Ref. No.	ECO-00000089
Issue date	23-10-2015
Valid to	22-10-2021

**NedZink NOVA, NedZink NOIR  
NedZink B.V.**

[www.bau-umwelt.com](http://www.bau-umwelt.com) / <https://epd-online.com>



## 1. General Information

<p><b>NedZink B.V.</b></p> <p><b>Programme holder</b>          IBU - Institut Bauen und Umwelt e.V.          Panoramastr. 1          10178 Berlin          Germany</p> <hr/> <p><b>Declaration number</b>          EPD-NED-20140083-IBA2-EN</p> <hr/> <p><b>This Declaration is based on the Product Category Rules:</b>          Building metals, 07.2014          (PCR tested and approved by the SVR)</p> <hr/> <p><b>Issue date</b>          23-10-2015</p> <hr/> <p><b>Valid to</b>          22-10-2021</p> <hr/> <p></p> <hr/> <p>Prof. Dr.-Ing. Horst J. Bossenmayer          (President of Institut Bauen und Umwelt e.V.)</p> <hr/> <p></p> <hr/> <p>Dr. Burkhard Lehmann          (Managing Director IBU)</p>	<p><b>NedZink® NOVA / NedZink® NOIR</b></p> <p><b>Owner of the Declaration</b>          NedZink B.V.          Hoofdstraat 1          6024 AA, Budel-Dorplein          Netherlands</p> <hr/> <p><b>Declared product / Declared unit</b>          1kg NedZink® NOVA/NedZink® NOIR, pre-weathered titanium zinc</p> <hr/> <p><b>Scope:</b>          The Life Cycle Assessment (LCA) was carried out according to ISO 14040, ISO 14044 and EN 15804. The LCA is performed for the pre-weathered products NedZink® NOVA/NedZink® NOIR manufactured by NedZink B.V. in Budel-Dorplein, Netherlands. NedZink B.V. has provided the site-specific data, background processes are taken from the Ecoinvent (version 2) database.           The LCA was carried out for the manufacturing phase of the declared product, containing information on raw and secondary material production, transport and packaging (cradle to gate). Possible credits after the end of life phase (module D) are also included. The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.</p> <hr/> <p><b>Verification</b></p> <table border="1"> <tr> <td colspan="2">The CEN Norm /EN 15804/ serves as the core PCR</td> </tr> <tr> <td colspan="2">Independent verification of the declaration according to /ISO 14025/</td> </tr> <tr> <td><input type="checkbox"/> internally</td> <td><input checked="" type="checkbox"/> externally</td> </tr> </table> <hr/> <p></p> <hr/> <p>Mr Carl-Otto Neven          (Independent verifier appointed by SVR)</p>	The CEN Norm /EN 15804/ serves as the core PCR		Independent verification of the declaration according to /ISO 14025/		<input type="checkbox"/> internally	<input checked="" type="checkbox"/> externally
The CEN Norm /EN 15804/ serves as the core PCR							
Independent verification of the declaration according to /ISO 14025/							
<input type="checkbox"/> internally	<input checked="" type="checkbox"/> externally						

## 2. Product

### 2.1 Product description

NedZink® NOVA / NedZink® NOIR is titanium zinc produced by NedZink according to EN 988. Small quantities, as specified in EN 988, of the alloy elements copper, titanium and aluminium are added to electrolytically refined zinc (with a purity of min. 99,995% Zn, Z1 according to EN 1179). The chemical composition, mechanical and physical properties and measurement tolerances are determined in the KOMO product certificate and the product certificate from Lloyd's Register, LRIQS (Approval QIS122). The defined material properties are checked by an independent and neutral research institute. This product certification and the ISO 9001 certificate for the quality management system at NedZink assure a constant and uniform high quality standard.

NedZink® NOVA is pre-weathered titanium zinc in a matt natural medium gray color. NedZink® NOIR is pre-weathered titanium zinc in an anthracite black color.

### 2.2 Application

NedZink® NOVA / NedZink® NOIR titanium zinc coils, sheets, strips and profiles are used for roof and façade cladding, interior use and rainwater drainage systems (gutters, downpipes and accessories).

NedZink® NOVA / NedZink® NOIR is intended mainly for outdoor use. However, the product is safe for indoor use and can be used as such. There are no harmful emissions to indoor air. The product does not contain VOC's.

## 2.3 Technical Data

### Constructional data

Name	Value	Unit
Coefficient of thermal expansion	22	10 <sup>-6</sup> K <sup>-1</sup>
Tensile strength	≥ 150	N/mm <sup>2</sup>
Yield strength elasticity	≥ 110	N/mm <sup>2</sup>
Elongation	≥ 40	%
Compressive strength	not relevant	N/mm <sup>2</sup>
Vickers hardness	≥ 40	HV3
Modulus of elasticity	≥ 80000	N/mm <sup>2</sup>
Melting point	420	°C
Thermal conductivity	110	W/(mK)
Electrical conductivity at 20°C	17	Ω <sup>-1</sup> m <sup>-1</sup>
Density	7200	kg/m <sup>3</sup>

Required testing standards are described in EN 988.

### 2.4 Placing on the market / Application rules

EN 988: 1996, Zinc and zinc alloys – Specifications for rolled flat products for building

EN 612: 2005, Eaves gutters with bead stiffened fronts and rainwater pipes with seamed joints made of metal sheet

BRL2034, KOMO K7054/03 zinc sheets

BRL2035, KOMO K7057/03 zinc gutters

BRL2044, KOMO K7063/03 zinc downpipes

### 2.5 Delivery status

NedZink material is delivered in thicknesses from 0.5 to 1.5 mm. The maximum width of sheets, coils and strips is 1,000 mm. The standard sheets are delivered in 1x2 m, 1x2.25 m and 1x3 m. Finished products are delivered to customer specification.

### 2.6 Base materials / Ancillary materials

#### Components of NedZink alloy

- Special-High-Grade zinc 99.995% (Z1 according to EN 1179): ≤ 99.835%
- Copper: 0.08 - 0.17%
- Titanium: 0.07 - 0.12%
- Aluminium: ≤ 0.015%

#### Auxiliary substances

Lubricant emulsion: 0.18 kg/t zinc

Lubricant oil: 0.63 kg/t zinc

Sulphuric acid: 0.83 kg/t zinc

Phosphate acid: 0.56 kg/t zinc

Temporary protection: 1 - 1.5 µm thickness

### 2.7 Manufacture

#### Pre-alloy:

In order to improve the properties of zinc, and for energy saving reasons, a pre-alloy with titanium, copper and aluminium is prepared in an induction furnace. This pre-alloy is poured into ingots.

#### Melting:

In the melting furnace the Special High Grade (SHG) zinc and the ingots are mixed homogeneously. Zinc with the right composition is pumped to the casting furnace.

#### Casting:

Casting takes place from the casting furnace into a vertical casting installation. The zinc is cast into blocks, cooled down and stored for further processing.

#### Rolling and coiling:

Blocks coming from the casting installation are homogeneous pre-heated for the "hot rolling" process. This takes place in a gas-fired continuous oven. During the hot rolling on a reversible rolling machine the blocks are processed to a pre-defined thickness. At the end of the rolling installation the zinc is coiled and stored to cool off.

On the reversible cold-rolling mill the coils are rolled to the desired final thickness. For cooling and lubrication of the process a special emulsion is used

#### Stretching and cutting:

Tensions in the coils are released by a stretching-and-straightening process. The zinc is uniquely marked and slitted and cut to the desired width and length.

#### Prewetting:

In a continuously operating production line the coils are degreased, brushed and phosphated to get a prepatinated medium gray appearance for NedZink® NOVA. With an additional process for NedZink® NOIR an anthracite black appearance is created. After rinsing and drying the material surface is provided with a thin protection layer and stored in the warehouse.

#### Quality control:

During the entire process extensive quality checks are conducted by the manufacturer and Lloyd's Register. Quality management control according to ISO 9001.

### 2.8 Environment and health during manufacturing

The manufacturing process is carried out according to the rules as laid down in the environmental permit. NedZink's policy follows the Total Quality Management (TQM). The directives of the Environmental Management System ISO14001 are an integral part of the Quality Management System ISO9001.

### 2.9 Product processing/Installation

NedZink material must be transported under dry and ventilated conditions. All contact between zinc and moisture during handling and transportation must be avoided. Mechanical deformation of zinc should be avoided in case the zinc temperature is not minimum 7°C.

### 2.10 Packaging

Titanium zinc coils and sheets are transported on wooden pallets. Packaging materials are polyethylene (PE foils) and paper/cardboard. All packaging materials are reusable and/or recyclable. Return in Germany is organized by Interseroh.



### 2.11 Condition of use

NedZink material develops a protective patina layer, which darkens the material slightly over time due to a reaction with oxygen and carbon dioxide (air and water). This layer is responsible for the high resistance of titanium zinc against corrosion.

Zinc in contact with air creates a zinc-oxide. Due to the influence of water a zinc-hydroxide is developed. In the final step a reaction with carbon dioxide creates a non-water-soluble coating of basic zinc carbonate, being the patina.

NedZink material is UV-resistant, non-flammable and resistant to radiating heat. Direct contact with chemical substances, especially those containing acids, has to be avoided. A list of substances to be avoided can be found on [www.nedzink.com](http://www.nedzink.com).

The material has a repellent effect to electrosmog (electromagnetic radiation) and the effects of rain and snow may be neglected.

## 2.12 Environment and health during use Environment

The due to air and water formed patina (zinc carbonate) is a natural protection layer. Due to this patina the transfer of zinc ions via rain water is constantly reduced, because this protection layer is non-water-soluble.

Further transfer of zinc ions is mainly related to the air pollution with SO<sub>2</sub>. (Lit: R.H.J. Korenromp, J.C.Th. Hollander). Due to the reduction of SO<sub>2</sub> concentration in the air, the zinc-concentration of precipitation in the rainwater has subsequently been reduced to one fifth of the former values during the last thirty years. As a result of all environmental regulations this amount will reduce even more in the future., due to the reduction of SO<sub>2</sub> concentration in the air. The transfer of zinc ions via rain water is constantly reduced due to developing a natural protection layer of zinc carbonate.

In aquatic systems only a small part of the total zinc concentration is available for organisms (bioavailable). It is related to the physical-chemical conditions of the receiving water body

### Health

When used according to their designated function, NedZink products will have no health effects. Zinc is an essential metal and does not accumulate in the body. The recommended daily intake of the mineral zinc is approximately 10 mg according to the Health Council of the Netherlands.

## 2.13 Reference service life

The service life is depends on the correct application according to the guidelines for processing and installation. The theoretical lifetime according to available literature is > 100 years<sup>12</sup>.

<sup>1</sup> K. Orzessek, W. van Tilborg: "Corrosie van atmosferisch blootgesteld zink"; C&O, 1995,

<sup>2</sup> Zinc...A Sustainable Material; International Zinc Association (2010)

## 2.14 Extraordinary effects

### Fire

### Reaction to fire

According to EN 13501 - 1 Fire classification of construction products and building elements: Class A1 "non-combustible". (96/603/EC)

### External fire performance

According to EN 13501 - 5 Fire classification of construction products and building elements: Class Broof. (2000/553/EC)

### Change of state (burning drip down / drop-out)

The melting point is 420 °C.

### Vaporization

Vaporization as zinc oxide (ZnO) occurs when heated above 650 °C. The produced ZnO smoke may cause zinc fever (diarrhea, dry throat, feverish) when inhaled over some period of time. The effects disappear completely in 1 to 2 days after the inhalation.

### Water

None.

### Mechanical destruction

None.

## 2.15 Re-use phase

### Disassembly:

During disassembly of a building construction or renovations NedZink material should be separated from other materials. Zinc can then be easily be collected for re-use and/or recycling.

### Re-use/Recycling:

Scrap produced during the manufacturing process from NedZink material are 100% remelted and fed back completely into NedZink's production process. The scrap from conversion and renovation work on building sites is collected and sold either directly to secondary smelting works or via a scrap metal dealer. The recycling rate for zinc sheets are over 90%<sup>3,4</sup>. Credits for this recycling are appointed in module D. These credits are based on a recycling percentage of 90%.

<sup>3</sup> Zinc... A Sustainable Material; International Zinc Association (2010),

<sup>4</sup> Zinc Recycling, Closing the Loop; International Zinc Association (2011)

## 2.16 Disposal

Due to the effective recycling process, no zinc has to be disposed.

The eural code for collected zinc after disassembly is 17.04.04.

The remaining residue, which is no longer valuable for the internal production process, is completely recycled by a third party. (eural 10.05.01)

## 2.17 Further information

Additional information, optional details, references, data sheets can be obtained at: [www.nedzink.com](http://www.nedzink.com)

## 3. LCA: Calculation rules

### 3.1 Declared Unit

The declared unit is 1 kg of NedZink NOVA / NedZink NOIR, pre-weathered titanium zinc.

### Declared unit

Name	Value	Unit
Declared unit	1	kg
Conversion factor to 1 kg	1	-



### 3.2 System boundary

Type of the EPD: Cradle-to-Gate for a specific product created at the NedZink production plant (declaration of a specific product from a manufacturer's plant). Modules A1, A2 and A3 contain information on the raw- and secondary material extraction, transport to the manufacturer, manufacturing and packaging. The possible credits after End-of-Life of the product are also included (module D). No other modules are included in the EPD. Considering the economic value of zinc, the end-of-waste stadium is met after deconstruction of the metal from the building (using hand-tools). As such, there will be no contribution from module C.

### 3.3 Estimates and assumptions

No estimates or assumptions were required for the creation of this EPD.

### 3.4 Cut-off criteria

No cut-off criteria were applied to primary information. However, for some data a generic database was used. The data in this database can contain cut-offs. Additionally, the LCI for SHG Zinc does not contain cut-offs.

### 3.5 Background data

Background processes are taken from the Ecoinvent database, version 2.2 (2010). Life cycle inventory data for the production of zinc concentrate and SHG Zinc

was taken from the 2009 "Report Primary Zinc Life Cycle Inventory" by the International Zinc Association. The data was adapted to the specific situation of NedZink and its SHG supplier, using the Dutch energy mix. The environmental impact of the SHG Zinc was then calculated using SimaPro V8. Site-specific data was provided by NedZink and verified against earlier studies.

### 3.6 Data quality

The data used for this study was both of high quality and recent (primary data directly from the manufacturer).

### 3.7 Period under review

Site-specific data for the year 2012 and 2013 was used in this study. Background data is taken from the Ecoinvent database, version 2.2 (2010) and varies in age.

### 3.8 Allocation

Allocation was avoided in this study, as required in EN 15804.

### 3.9 Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to /EN 15804/ and the building context, respectively the product-specific characteristics of performance, are taken into account.

## 4. LCA: Scenarios and additional technical information

Modules A4, B1-B7 and C1-C4 are not considered in this study. The possible credits given in Module D are based on 100% recyclability of zinc products. After the collection (a collection rate of 90% was assumed), zinc scrap is re-melted and converted to secondary zinc. This is not done by NedZink but by third parties. The possible credit for the zinc gained through re-melting is calculated using the dataset of the primary zinc production.

## 5. LCA: Results

### DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED)

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	MND	MND	MNR	MNR	MNR	MND	MND	MND	MND	MND	MND	X

### RESULTS OF THE LCA - ENVIRONMENTAL IMPACT: 1 kg NEDZINK NOVA/NOIR

Parameter	Unit	A1-A3	D
Global warming potential	[kg CO <sub>2</sub> -Eq.]	2.09E+0	-1.15E+0
Depletion potential of the stratospheric ozone layer	[kg CFC11-Eq.]	1.11E-7	-7.40E-8
Acidification potential of land and water	[kg SO <sub>2</sub> -Eq.]	1.20E-2	-9.64E-3
Eutrophication potential	[kg (PO <sub>4</sub> ) <sup>3</sup> -Eq.]	3.26E-3	-1.82E-3
Formation potential of tropospheric ozone photochemical oxidants	[kg ethene-Eq.]	2.03E-4	-8.09E-5
Abiotic depletion potential for non-fossil resources	[kg Sb-Eq.]	8.13E-5	-7.42E-5
Abiotic depletion potential for fossil resources	[MJ]	IND	IND


### RESULTS OF THE LCA - RESOURCE USE: 1 kg NEDZINK NOVA/NOIR

Parameter	Unit	A1-A3	D
Renewable primary energy as energy carrier	[MJ]	1.37E+0	-2.56E-1
Renewable primary energy resources as material utilization	[MJ]	IND	IND
Total use of renewable primary energy resources	[MJ]	1.37E+0	-2.56E-1
Non-renewable primary energy as energy carrier	[MJ]	2.22E+1	-1.17E+1
Non-renewable primary energy as material utilization	[MJ]	IND	IND
Total use of non-renewable primary energy resources	[MJ]	2.22E+2	-1.17E+2
Use of secondary material	[kg]	IND	IND
Use of renewable secondary fuels	[MJ]	IND	IND
Use of non-renewable secondary fuels	[MJ]	IND	IND
Use of net fresh water	[m <sup>3</sup> ]	2.26E+0	-1.45E+0

### RESULTS OF THE LCA – OUTPUT FLOWS AND WASTE CATEGORIES: 1 kg NEDZINK NOVA/NOIR

Parameter	Unit	A1-A3	D
Hazardous waste disposed	[kg]	2.00E-3	IND
Non-hazardous waste disposed	[kg]	1.85E-2	IND
Radioactive waste disposed	[kg]	IND	IND
Components for re-use	[kg]	IND	IND
Materials for recycling	[kg]	IND	9.00E-1
Materials for energy recovery	[kg]	IND	IND
Exported electrical energy	[MJ]	IND	IND
Exported thermal energy	[MJ]	IND	IND

## 6. LCA: Interpretation

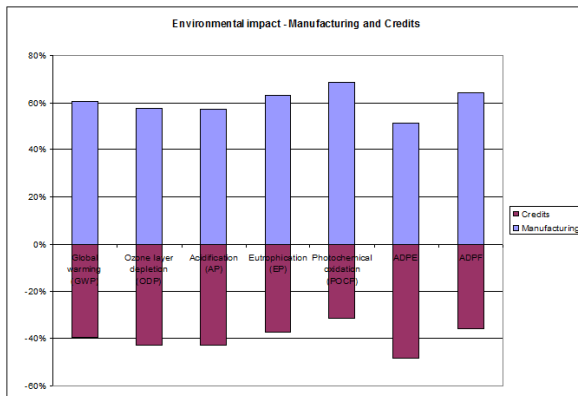

Impact categories for 1 kg of Nova/Noir pre-weathered zinc

Life cycle inventory data for the production of zinc concentrate and SHG Zinc was adapted to the specific situation of NedZink and its SHG supplier, using the Dutch energy mix. (see also 3.5 Background Data) The contribution of Special High Grade Zinc (SHG Zinc) is the dominating factor in the **GWP** (Global Warming Potential) with a 53% contribution. The remaining 47% mainly consists of hazardous waste disposal (landfill) and energy usage (electricity and

gas). The chemicals used during pre-weathering also have a small contribution (as a used material, not as waste). Because of the high contribution of SHG Zinc and the high recyclability, the amount of credits gained in module D is equal to 55% of the initial impact value. The ODP (Ozone Layer Depletion) is mainly determined by the SHG Zinc contribution (73%). The remainder consists mainly of energy usage during the production process (melting, rolling, pre-weathering) and hazardous waste disposal. Credits are determined by recycled zinc. The AP (Acidification Potential) is dominated by the contribution of SHG Zinc (86%). The remainder is largely influenced by hazardous waste disposal and energy usage. The EP (Eutrophication Potential) is mainly determined by the contribution of SHG Zinc (40%) and hazardous waste disposal (31%). The contribution of SHG Zinc to the POCP (Photochemical Oxidation) is only 29%. The remainder is almost completely attributed to pre-weathering chemicals (both as input materials and as hazardous waste disposal).

The **ADPE** (Abiotic Depletion Potential) is almost entirely caused by the contribution from SHG Zinc (96%) with negligible contributions from other processes. As such, the amount of credits gained in module D is very close to the initial contribution.

## 7. Requisite evidence

In a literature study of TNO<sup>5</sup> the emissions from corrosion of zinc to water has been evaluated. This corrosion rate refers to the loss of metallic zinc. The run-off rate is the wash-off of zinc from the patina layer. This run-off rate is generally lower than the corrosion rate.

During the built up of the zinc patina layer the run-off is lower than the corrosion rate. The growth of the patina layer delays the corrosion. The run-off rate is influenced by the atmospheric conditions, of which the

SO<sub>2</sub> concentration is the most important variable. With the decreasing of the SO<sub>2</sub> concentration, the corrosion rate is also decreasing.

In areas with higher SO<sub>2</sub>-concentration a run-off rate off 3 g/m<sup>2</sup>.yr can be calculated and 2 g/m<sup>2</sup>.yr in areas with lower concentration.

<sup>5</sup>TNO-MEP-R99/441

## 8. References

### Institut Bauen und Umwelt

Institut Bauen und Umwelt e.V., Berlin(pub.): Generation of Environmental Product Declarations (EPDs);

### General principles

for the EPD range of Institut Bauen und Umwelt e.V. (IBU), 2013/04  
[www.bau-umwelt.de](http://www.bau-umwelt.de)

### ISO 14025

DIN EN ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

### EN 15804

EN 15804:2012-04+A1 2013: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

### PCR Part B

Institut Bauen und Umwelt e.V., Berlin (pub.): Product Category Rules for Construction Products from the range of Environmental Product Declarations of Institut Bauen und Umwelt (IBU), Part B: Requirements on the EPD for structural steels. July 2014  
[www.bau-umwelt.de](http://www.bau-umwelt.de)

### PCR Part A

Institut Bauen und Umwelt e.V., Berlin (pub.): Product Category Rules for Construction Products from the range of Environmental Product Declarations of Institut Bauen und Umwelt (IBU), Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report. September 2012  
[www.bau-umwelt.de](http://www.bau-umwelt.de)

### ISO 9001

ISO 9001:2008  
 Quality management systems — Requirements

**ISO 14040**

NEN EN ISO 14040:2006  
Environmental management - Life cycle assessment -  
Principles and framework

**ISO 14044**

NEN EN ISO 14044:2006  
Environmental management - Life cycle assessment -  
Requirements and guidelines

**KOMO product certificates**

BRL2034: K7054/03 zinc sheets  
BRL2035: K7057/03 zinc gutters  
BRL2044: K7063/03 zinc downpipes

**Product certificate Industrial Quality Scheme for  
Product Certification by Surveillance of Quality  
Systems (approval No QIS 122).**

Lloyd's Register EMEA

**EN 988**

NEN EN 988:1996-11  
Zinc and zinc alloys - Specification for rolled flat  
products for building

**EN 1179**

NEN EN 1179:2003-06  
Zinc and zinc alloys - Primary zinc

**EN 612**

NEN EN 612:2005-02  
Eaves gutters with bead stiffened fronts and rainwater  
pipes with seamed joints made of metal sheet

**EN 13501-1**

NEN EN 13501-1:2007+A1:2009  
Fire classification of construction products and building  
elements - Part 1: Classification using data from  
reaction to fire tests

**EN 13501-5**

NEN EN 13501-5:2006+A1:2009  
Fire classification of construction products and building  
elements - Part 5: Classification using data from  
external fire exposure to roofs tests

**Report Primary Zinc Life Cycle Inventory**

International Zinc Association (2009)

**Zinc...A Sustainable Material**

International Zinc Association (2010)

**Zinc Recycling, Closing the Loop**

International Zinc Association (2011)

**R.H.J. Korenromp, J.C.Th Hollander:** "Diffusive  
Emissions of zinc due to atmospheric corrosion of zinc  
and zinc coated (galvanised) materials", TNO-MEP-  
99/441 (1999)

**dr. P. Versloot, ir. M. de Vries:** "Vastleggen  
recyclingsysteem voor bouwzink", Intron rapport 96078  
(1996)

**K. Orzessek, W. van Tilborg:** "Corrosie van  
atmosferisch blootgesteld zink", C&O (1995)

**Klimaschutz-Zertifikat 2012**

Interseroh Dienstleistungs GmbH

**SimaPro V8**

Life Cycle Assessment software

**Ecoinvent V2.2**

Life Cycle Inventory database, 2010



**Publisher**

Institut Bauen und Umwelt e.V.  
Panoramastr. 1  
10178 Berlin  
Germany

Tel +49 (0)30 3087748- 0  
Fax +49 (0)30 3087748- 29  
Mail [info@bau-umwelt.com](mailto:info@bau-umwelt.com)  
Web [www.bau-umwelt.com](http://www.bau-umwelt.com)

**Programme holder**

Institut Bauen und Umwelt e.V.  
Panoramastr. 1  
10178 Berlin  
Germany

Tel +49 (0)30 - 3087748- 0  
Fax +49 (0)30 - 3087748 - 29  
Mail [info@bau-umwelt.com](mailto:info@bau-umwelt.com)  
Web [www.bau-umwelt.com](http://www.bau-umwelt.com)

**Author of the Life Cycle Assessment**

Stichting Adviescentrum Metaal  
Kelvinbaan 40  
3439MT Nieuwegein  
Netherlands

Tel +31 (0)30-693 00 55  
Fax +31 (0)30-693 00 57  
Mail [info@metaaladvies.nl](mailto:info@metaaladvies.nl)  
Web [metaaladvies.nl](http://metaaladvies.nl)

**Owner of the Declaration**

NedZink B.V.  
Hoofdstraat 1  
6024AA Budel-Dorplein  
Netherlands

Tel +31 (0)475 455700  
Fax +31 (0)475 455790  
Mail [info@nedzink.com](mailto:info@nedzink.com)  
Web [www.nedzink.com](http://www.nedzink.com)